

# Model B<sup>2</sup>

# SNUBNOSE Concrete Reclaimer

SIDE-BY-SIDE



### Need to wash-out a lot of trucks at once?

The Model B<sup>2</sup> Side-by-Side SNUBNOSE Reclaimer System offers the ability to reclaim from 1 up to 2 yards-per-minute, from 4 trucks at once, with the added benefit of Redundancy!

Competitive brands offer discharge “buffers” to feed their reclaimers, which only deliver about 1/3 yard-per-minute! That’s right, it takes 3 minutes to reclaim 1 yard—**up to 6 times slower** than the BFK!

In addition, if either the buffer or the reclaimer goes down, you’re done reclaiming until you get it fixed!

Not with a B<sup>2</sup> system. If one Reclaimer becomes in-operable, you still have the ability to reclaim!

### Built-in Redundancy!

Generally recommended for  
**Large Size Ready-Mix Plants**  
operating around  
**20 to 50 Mixer Trucks**

Design capacity  
**1 to 2 yards<sup>3</sup>-per-minute**  
[up to 1.5 m<sup>3</sup>/minute]

**4 Truck Discharge**

*Only* BFK has eliminated **Grease Fittings, Shaft Seals, and Shaker Decks**, making them the most **user-friendly** and **affordable** Reclaimers available!

A Reclaimer so simple, you can install, operate and maintain it yourself, without the need of a factory technician!

### The BFK Difference!

Most competitors use buffer tubs to attempt to increase traffic flow at their slower reclaimers.

Many say they can allow up to 6 trucks to wash-out at once. Problem is, the buffer tubs realistically hold only about 4 yards maximum. Any more than that, and all the trucks at the reclaimer must slow down and wait for the buffer to catch up.

And that may be awhile, as the rated thru-put is only 1/3 yd<sup>3</sup>/min!

BFK eliminates the need for expensive buffer tubs (usually more expensive than the reclaimer itself!) by offering a reclaimer design with superior thru-put speed!

- High Reclamation Rate
- Less Time at the Reclaimer
- Lower equipment cost
- Built-In Redundancy!

That’s the BFK Difference!


**BFK TECHNOLOGIES INC.**  
CONCRETE RECLAMATION SYSTEMS



**Simple, Compact, Efficient  
CONCRETE RECLAIMERS**

*Since 1997*

They Simply Work!

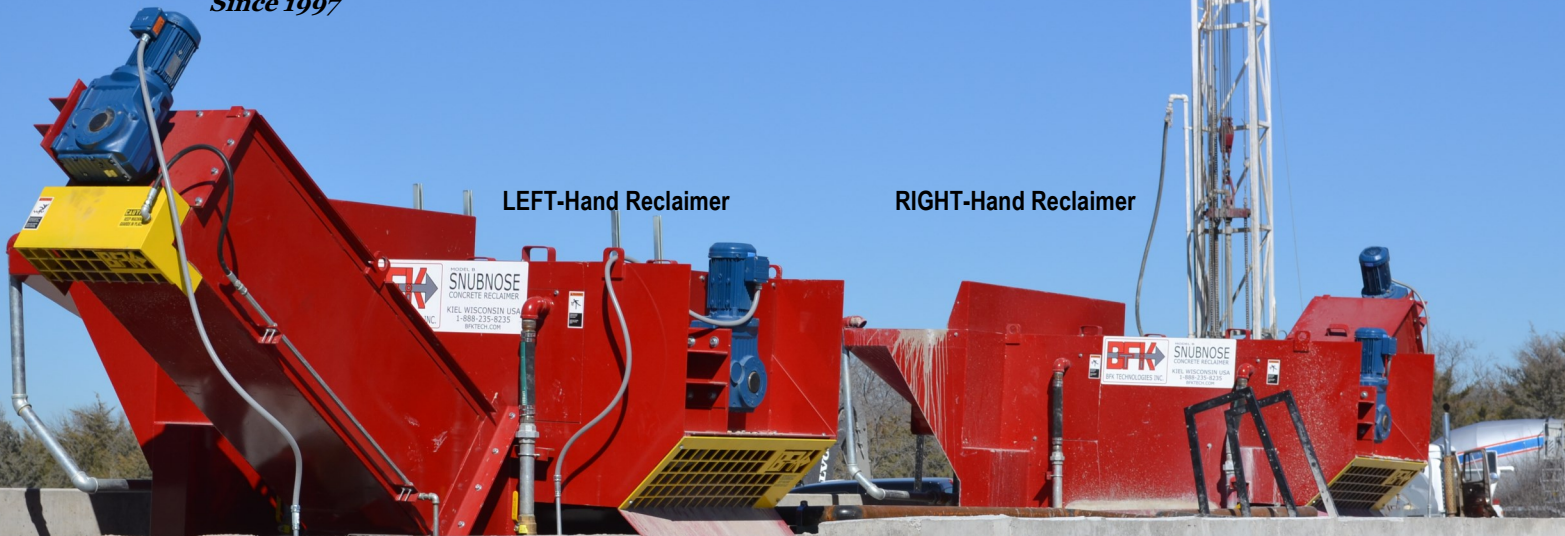

- B<sup>2</sup> SNUBNOSE SPECIFICATIONS**
- 5HP 3.7kW Submersible Pump
  - EACH Reclaimer includes:**
    - 5HP 3.7kW Rotary Screen Gearmotor
    - 5HP 3.7kW Sand Screw Gearmotor
    - 14" 356mm Dia. Infeed Auger
    - 1/4" 6mm Square Op. Rock Screen
    - 24" 610mm Dia. Sand Screw
    - (2) Washout Stingers

**Overall Dimensions:**  
EACH Snubnose  
12'L x 8'-6"H x 8'W [3700 x 2600 x 2500mm]

**Approx. Shipping Weight:**  
15000# [6800kg] **TOTAL for (2) Snubnose**

Rights reserved to alter specifications without notice.  
Metric equivalents for informational purposes only.

Standard: 230/460VAC, 60Hz, 3Ø  
Optional: 380/50/3Ø or 575/60/3Ø  
Single Phase and other voltage/frequency combinations  
also available—Consult Factory.

**Ships Worldwide in (2) 20' Standard Containers**



*TWO Screens*

*TWO Screws*

*TWO Pumps*

*...only 30  
Horsepower*



[www.BFKTECH.com](http://www.BFKTECH.com)  
**1.888.BFK.8BFK**  
**1.888.235.8235**

Tel: 920.894.1113  
Fax: 920.894.4991  
Email: [sales@bfktech.com](mailto:sales@bfktech.com)



BFK Technologies Inc.  
1113 Park Avenue  
Kiel WI 53042 USA



**WARNING: Cancer and Reproductive Harm—**  
[www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov)